

- Fully electronic Macro volume 5 mL and 10 mL models
- High precision alternative to using pipette controllers with serological pipets
- Fast, easy multi-dispensing
- 2 custom programmable volume pre-sets
- Sterile and filtered tips available in new recyclable VistaClear™ boxes



Macro Ovation: Same comfort. Big-time Volume.

Large volume liquid handling often requires uncomfortable and tiring postures. This is especially true for performing procedures in a hood. The innovative design of macro Ovation pipettes allow a relaxed grip and comfortable posture while pipetting volumes up to 10mL.

The macro 5 mL and 10 mL Ovation pipettes are fully electronic, providing a broad menu of liquid handling functions for rapid, precise and accurate dispensing, up to 50 times from a single aspiration. Volumes, speeds and repetition settings are easy to setup, store and instantly recall for pipetting, mixing, serial diluting or repeat dispensing.

Ovation 5 mL and 10 mL tips offer easy access into tubes, bottles and cell culture flasks. Standard, sterile and sterile filtered tips are available in several packaging configurations, including recyclable VistaClear[™] boxes. When extra length is needed to reach the bottom of tall vessels, both Ovation pipette models can accommodate the use of glass or plastic serological pipets.



Large volume liquid handling with the convenience of disposable tips.

A gentle push is all that's required to acquire a tip, and touching a button ejects it – making large volume pipetting as easy and productive as any other liquid handling task.



Electronic operation eliminates guesswork.

Settings and speeds are easy to set, store and recall for the exacting performance your applications require. Pipetting functions include *multiple* (repeat) dispensing, pipetting, pipetting with delayed overblow, mixing, and serial diluting.



Ovation pipettes stand on their own.

There's no need to worry about tip or counter contamination when its necessary to put down the pipette in the middle of a procedure.

EAL

In-lab calibration made simple.

Adjustments are easy when needed for different environmental conditions or liquid types – without tools! Returning to the factory calibration setting (or any setting) takes just the push of a keypad button.

VistaLab Catalog No.	Color	Volume Range	Dispensing Increments	Accuracy*	Precision*
1065-05mL		100µL–5000µL	. 10µL	±0.6% at 5000μL ±0.6% at 2500μL ±2.4% at 500μL	0.16% at 5000µL 0.20% at 2500µL 0.60% at 500µL
1065-10mL		200µL–10mL	10µL	±0.6% at 10mL ±1.0% at 5mL ±2.4% at 1mL	0.16% at 10mL 0.20% at 5mL 0.30% at 1mL
		•		harge the pipette's batt cluded with Ovation Ma	,

Catalog # 9060-9005 - Power Supply - all Countries

Catalog # 9060-9006 - Power Supply with 4 pipette connections - all Countries

Tips and Accessories

5000µL Tip capacity 4058-5000 Catalog number

	MODEL:	5 m L	10 m L
N S	Bulk, 250 graduated ¹ tips/bag (5000µL)	5000μL	10mL
	or 100 tips/bag (10mL)	4058-5000	4058-6000
TIOI	Box	5000μL	10mL
	1 tray, 100 graduated ¹ tips (5000µL) or 35 tips (10mL)	9048	9050
RIP	Filtered ² , sterile, non-pyrogenic, certified RNase/DNase free,	5000μL	10mL
	individually wrapped, 50 graduated ¹ tips (5000 µL) or 50 tips (10 mL)	4058-5332	4058-6332
ESC	VistaClear™ Box 35 tips/box		10mL 4058-6100
P D	VistaClear™ Box – sterile	5000μL	10mL
	60 graduated tips/box (5000µL) or 35 tips/box (10mL)	4058-5102	4058-6102
F	VistaClear [™] Box – filtered, sterile, non-pyrogenic, certified RNase/	5000μL	10mL
	DNase free, 60 graduated tips/box (5000µL) or 35 tips/box (10mL)	4058-5133	4058-6133

0.1mL graduations

² Filtered tips contain a unique hydrophobic filter which acts as a barrier to aqueous liquids and aerosols, protecting the pipette and sample from trace amounts of carryover.


	MODEL:	5 m L	10 m L	
	Nozzle Insert, 1/box		9060-6008	
S	Nozzle Filter Kit, 10/bag (5mL) or 5/bag (10mL)	9060-5009	9060-6009	
ш	Replacement Nozzle, 2/box (5mL) or 1/box (10mL)	9060-5010	9060-6010	
R	Ejector Sleeve	9060-5011	9060-6011	
s o	Sero-Adapter for serological pipets	9060-5012	n/a	
s s	Rechargeable lithium ion battery	9060-4001 9060-9005		
ш U	Power Supply - all Countries, 90-264VAC, 47-63Hz			
A C 0	Power Supply w/4 pipette connections - all Countries 90-264VAC, 47-63Hz	9060-9006		
	Ovation Pipette Stand			



031 336 90 00 • www.scantecnordic.se



Think Differently. Feel Better. www.vistalab.com

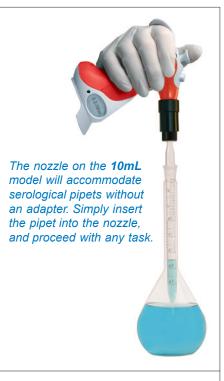

Specifications subject to change



The **5mL** model includes an adapter for use with serological pipets, which easily attaches to the pipette in place of its standard nozzle.

Catalog # 9060-5012

VistaLab Technologies, Inc. 2 Geneva Boad

 2 Geneva Road
 (888) 652-6520

 Brewster, NY 10509 USA
 (914) 244-6226

 ©2015 VistaLab Technologies, Inc.
 All rights reserved.

 Printed in the U.S.A.
 Lit. #374045 Rev F